



# HELLA VALUEFIT

## AMBER LED BEACON



### AMBER LED BEACON WITH DUAL MOUNTING SYSTEM



**MAGNETIC &  
FIX MOUNT**


**MAIN APPLICATIONS:** Universal

#### PRODUCT FEATURES

- Dual mounting system – magnetic/fixed mount
- Multi-Voltage/High Voltage Input 10-80VDC for direct mount, 12-24V for magnetic mount
- Long life LEDs rated to 30,000 hours of operation.
- Reverse polarity protected
- Polycarbonate Lens
- Avg. current: @12V – 0.3A, @24V – 0.1A
- Operating temperature: -30C° to +70C°
- 1 Year Manufacturing Warrant

**Part Number:** 2RL-357015-021

**Short Code:** RL1502

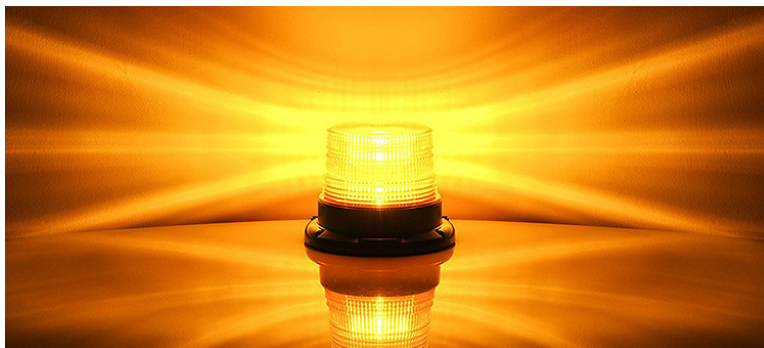

# HELLA VALUEFIT

## AMBER LED BEACON

### INSTALLATION MANUAL

#### MAGNETIC MOUNT

– Insert cigarette lighter plug into 12/24V cigarette lighter socket and mount Beacon as illustrated (Fig.1.1)

#### FIXED MOUNT

– Remove cigarette lighter plug as illustrated (Fig.1.2), connect red wire with inline fuse (recommended 10A) to positive battery terminal and black wire to negative terminal. Secure Beacon base using supplied bolts.

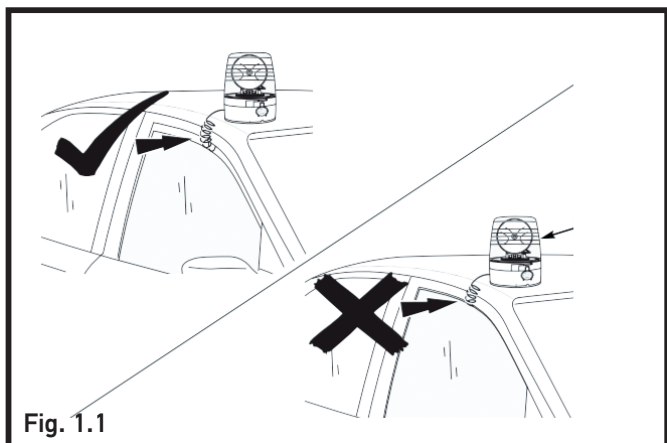


Fig. 1.1



Fig. 1.2

